

Maintenance guide


A Parky floor is very maintenance-friendly. A good follow-up of our advice will lead to an extended life of your Parky wood floor. A few tips:

Well begun, half won!

A few precautions will ensure a longer life for your Parky floor:

- Maintain the recommended room temperature of 16-25°C and ensure a relative humidity of 40-60% at all times. Pay particular attention to the dry winter months when prolonged drying of the air often occurs. In this case, use suitable humidifiers
 - Pieces of **felt** under the chairs.
 - **Parquet wheels** under office chairs and a protection mat under the chair.
 - A **doormat** if the floor is installed at the entrance.
- Small stones on your shoes can cause small scratches.

For this reason it is important to wipe your feet before stepping on the Parky floor.

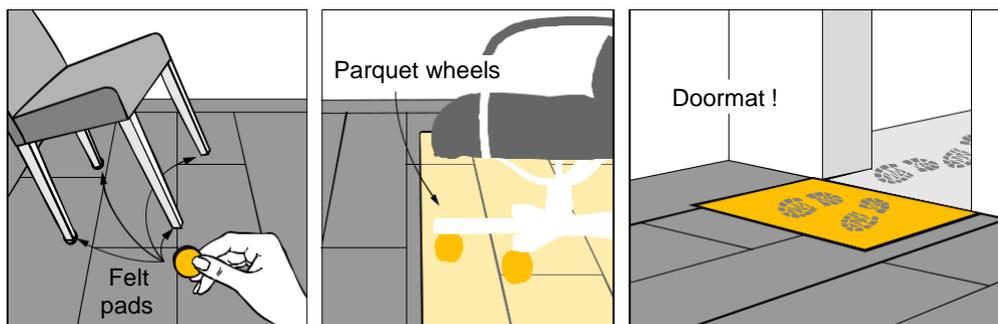

How to keep your floor in a fabulous shape

You can count on the **Parky Wood Floor Cleaner** to clean your floor without damaging the varnish. It was specially developed to remove dirt and protect your wood. The cleaner breaks down the molecular structure of dirt, greasy deposits, sticky residues and stubborn grease stains without affecting the surface.

In order to remove all the dirt, add this specially designed 'Parky Wood Floor Cleaner' to your water. Always dilute with water, depending on the application (see table on the packaging). Apply the cleaner with a wrung cloth. Rinse and wring the dirty cloth in a second bucket of clear water. Mop a second time with the clean and wrung cloth. **BEWARE! Avoid excessive use of water.**



Repair a scratch

Repair small scratches in a jiffy. Boxes with one or two pens are available, depending on the colour of your floor. Once repaired, no more dirt can penetrate the scratch.

'How to use' can be found on the parky website at downloads. www.parky.com/en/professionals/downloads



A hole fixed in no time

Using the **Repair Wax** you can repair dents that come through the paint. The wax repairs the damage and protects your floor against penetrating moisture. The Repair Wax kit contains seven wax blocks, a melting knife and a spatula.

'How to use' can be found on the parky website at downloads. www.parky.com/en/professionals/downloads

Severe damage? Not a disaster

Thanks to the clic system, you can easily replace a board in your floor. Consult your distributor or replace your board yourself.

The complete manual of our maintenance products and tutorials for replacing a board can be found at www.par-ky.com



PARKY

Do you have any questions ? Please do not hesitate to contact your local dealer or the head office in Belgium, call +32 56 52 88 49 or email info@par-ky.com

Decospan nv, Industriezone Grensland, Lageweg 33, 8930 Meneen - Belgium
www.par-ky.com

Proudly
made in
Belgium

a product of
DECOSPAN
Wood Sock Bie 15