


## General

|                   |                                                              |
|-------------------|--------------------------------------------------------------|
| Top layer         | Thickness: 0.6mm (1/32 inch)                                 |
| Dimensions        | Length: 1506mm (59-5/16 inch)                                |
|                   | Width: 166mm (6-1/2 inch)                                    |
|                   | Thickness: 10mm (3/8 inch)                                   |
| Core              | High Density Fibreboard (HDF)                                |
| Bevel             | 4 bevels (4x0.5mm)                                           |
| Gloss             | Super matt (3)                                               |
| Structure         | Brushed                                                      |
| Backing           | Real Wood                                                    |
| Density           | 850kg/m <sup>3</sup>                                         |
| Weight/sqm        | 7kg                                                          |
| Connection System | Unifit X                                                     |
| Installation type | Floating                                                     |
| Standard Colors   | <u>Oaks</u> : Essence, Silk, Dune, Sky, Valley, Mountain Oak |

## Product composition

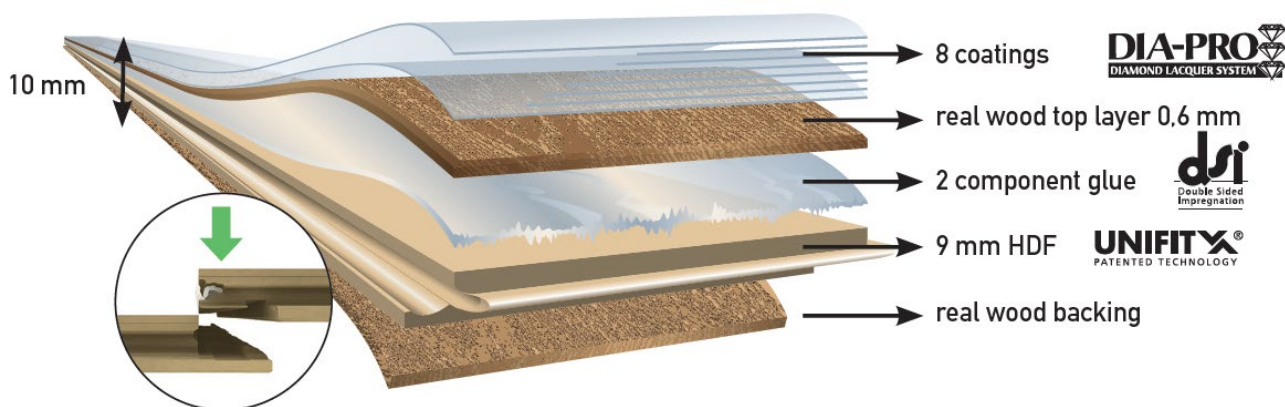

## Technical specifications

|                                  |                                                                                              |
|----------------------------------|----------------------------------------------------------------------------------------------|
| Domestic Usage Classification    | 23                                                                                           |
| Commercial Usage Classification  | 33                                                                                           |
| CE Certification                 | EN14342:2013                                                                                 |
| Warranty                         | Residential limited lifetime warranty<br>Commercial use: 10 years                            |
| Formaldehyde Emission            | E1                                                                                           |
| PCP                              | PCP free                                                                                     |
| Underfloor heating               | High suitability, with a thermal resistance of 0.073m²K/W there is a minimal waste of energy |
| Thermal resistance               | 0,073m²K/W                                                                                   |
| Thermal conduction               | 0,14W/mK                                                                                     |
| Fire reaction & smoke generation | Cfl-s1                                                                                       |
| Maintenance                      | Weekly cleaning with 'Parky wood floor cleaner'                                              |

## Packaging

|        |                                                                               |
|--------|-------------------------------------------------------------------------------|
| Box    | 8 boards<br>Surface 2,000 m² (21.53 sq.ft)<br>Gross weight 17,3 kg (38 lbs)   |
| Pallet | 72 boxes<br>Surface 144,00 m² (1550 sq.ft)<br>Gross weight 1260 kg (2778 lbs) |

