


General

| | |
|-------------------|--|
| Top layer | Thickness: 0.6mm (1/32 inch) |
| Dimensions | Length: 2050mm (80-3/4 inch) |
| | Width: 233mm (9-1/8 inch) |
| | Thickness: 10mm (3/8 inch) |
| Core | High Density Fibreboard (HDF) |
| Bevel | 4 bevels (2x 1.5mm + 2x 0.5mm) |
| Gloss | Super matt (3) |
| Structure | Brushed |
| Backing | Real Wood |
| Density | 850kg/m ³ |
| Weight/sqm | 7kg |
| Connection System | Unifit X |
| Installation type | Floating |
| Standard Colors | <u>Oaks</u> : Essence, Silk, Dune, Sky, Valley, Mountain Oak |
| | <u>Walnuts</u> : Smoked, Frozen, Stardust Walnut |

Product composition

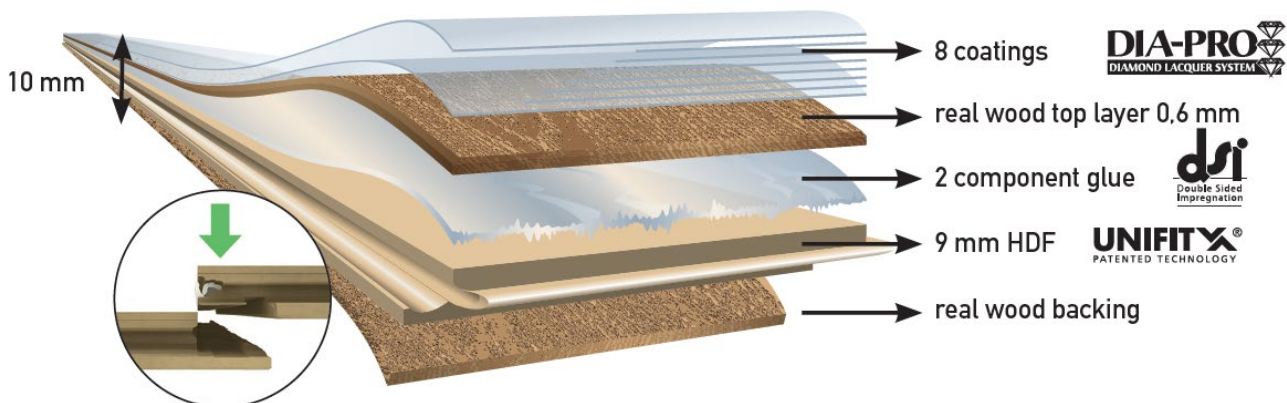

Technical specifications

| | |
|----------------------------------|---|
| Domestic Usage Classification | 23 |
| Commercial Usage Classification | 33 |
| CE Certification | EN14342:2013 |
| Warranty | Residential limited lifetime warranty Commercial use: 10 years |
| Formaldehyde Emission | E1 |
| PCP | PCP free |
| Underfloor heating | High suitability, with a thermal resistance of 0.073m ² K/W there is a minimal waste of energy |
| Thermal resistance | 0,073m ² K/W |
| Thermal conduction | 0,14W/mK |
| Fire reaction & smoke generation | Cfl-s1 |
| Maintenance | Weekly cleaning with 'Parky wood floor cleaner' |

Packaging

| | |
|--------|--|
| Box | 5 boards Surface 2,388 m ² (25.7 sq.ft) Gross weight 19,2 kg (42 lbs) |
| Pallet | 44 boxes Surface 105,07 m ² (1131 sq.ft) Gross weight 861 kg (1898 lbs) |

