


General

Top layer	Thickness: 2mm (5/64inch)
Dimensions	Length: 1935mm (76 1/8 inch)
	Width: 195mm (7 5/8 inch)
	Thickness: 12mm (1/2 inch)
Core	High Density Fibreboard (HDF)
Bevel	4 bevels (0.5mm)
Gloss	Matt (10)
Structure	Brushed
Backing	Real Wood + Cork
Density	>850kg/m ³
Weight/sqm	10kg
Connection system	Unifit X
Installation type	Floating
Standard Colors	<u>Oaks</u> : Essence, Ivory, Desert, Silk Oak

Product composition

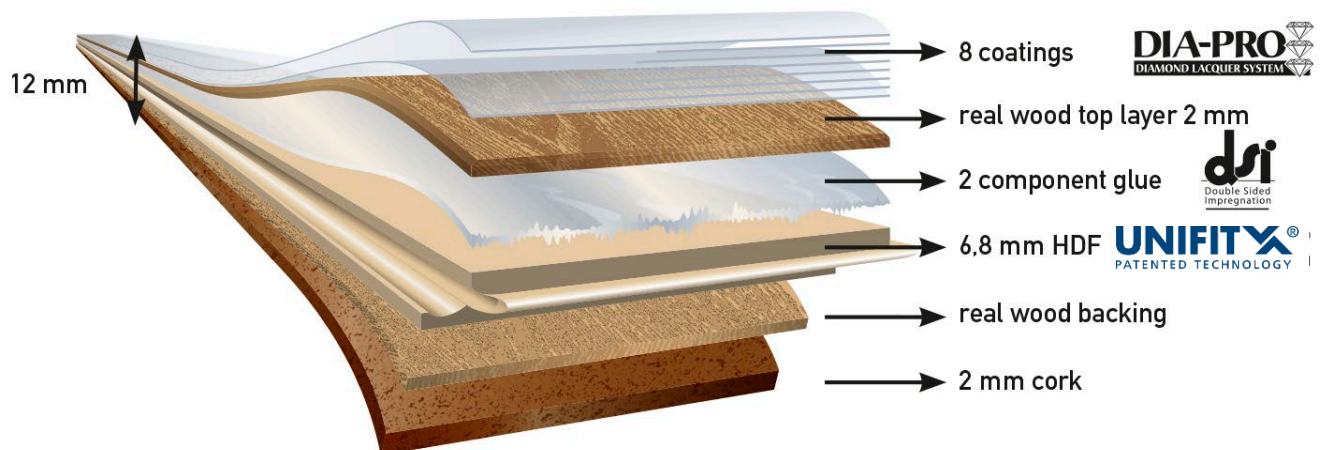

Technical specifications

Domestic Usage Classification	22
Commercial Usage Classification	31
CE Certification	EN14342:2005+A1:2008
Warranty	Residential use: 15 years - low commercial use: 5
years Formaldehyde Emission	E1
PCP	PCP free
Underfloor heating	ok but glued
Thermal resistance	0,100m ² K/W
Thermal conduction	0,11W/mK
Fire reaction & smoke generation	Dfl-s1
Maintenance	Weekly cleaning with 'Parky wood floor cleaner'

Packaging

Box	6 boards Surface 2,264m ² (24.37 sq.ft) Gross weight 18,80kg (41.45 lbs)
Pallet	50 boxes Surface 113,20m ² (1218 sq.ft) Gross weight 960kg (2116 lbs)

