


SWING

SPECIFICATION SHEET

GENERAL

Top layer	Thickness: 0.6 mm
Dimensions	Length: 593 mm (23-3/8 inch) Width: 121 mm (4-3/4 inch) Thickness: 10 mm (3/8 inch)
Core	High Density Fibreboard (HDF)
Bevels	4 bevels (4x mini)
Gloss	Super matt (3% +/-1)
Structure	Brushed
Backing	Real wood
Density	850 kg/m ³
Weight/sqm	9.5 kg
Connection system	Unifit X®
Installation type	Floating — herringbone pattern
Standard colours	Natural Oak premium, Ivory Oak premium, Sand Oak rustic light, Sahara Oak premium, Hazel Oak rustic light, Smoked Walnut premium Other colours on demand

PRODUCT COMPOSITION

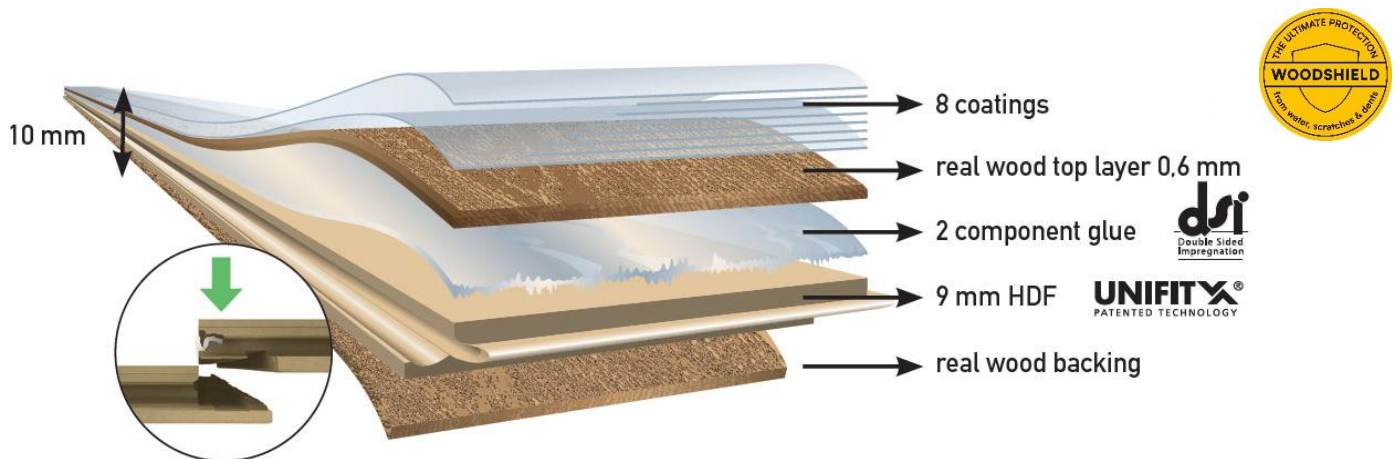

PACKAGING

Box	11 boards - surface 0.789 m ² (8.49 sq.ft) - gross weight 6.7 kg (14.8 lbs)
Pallet	126 boxes - surface 99.45 m ² (1070 sq.ft) - gross weight 858 kg (1892 lbs)

TECHNICAL SPECIFICATIONS

Domestic Usage Classification	23
Commercial Usage Classification	33
CE Certification	EN14342
Warranty	Residential limited lifetime warranty Commercial use: 10 years
Formaldehyde Emission	E1
PCP	PCP free
Underfloor heating	High suitability, with a thermal resistance of 0.073 m ² K/w there is a minimal waste of energy (cf instructions)
Underfloor cooling	Suitable (cf instructions)
Thermal resistance	0.073 m ² K/W
Thermal conduction	0.14 W/mK
Fire reaction & Smoke generation	Cfl-s1
Sustainability	PEFC certified (FSC® certification on demand)
Maintenance	Weekly cleaning with 'Parky wood floor cleaner'




PEFC
PEFC/07-32-60
Promoting
Sustainable Forest
Management
www.pefc.org



FSC®
www.fsc.org
FSC® C095327
The mark of
responsible forestry

Eurofins Product Testing

French VOC Regulation		Degree of March 2011 (Dev1101903D) and Arrêté of April 2011 (DEVL 1104875A) modified in February 2012 (DEVL1133129A)
French CMR components	Pass	Regulation of April and May 2009 (DEVPO908633A and DEVPO910046A)
Italian CAM Edilizia	Pass	DM 23 giugno 2022 n. 256, GURI n. 183 del 6 agosto 2022
ABG/AgBB	Pass	Ausschuss zur gesundheitlichen Bewertung von Bauprodukten (June 2021)
Belgian Regulation	Pass	Royal decree of May 2014 (C-2014/24239)
Indoor Air Comfort	Pass	Indoor Air Comfort 9.0 of June 2023
Indoor Air Comfort Gold	Pass	Indoor Air Comfort GOLD 9.0 of June 2023
BREEAM International	Exemplary level	BREEAM International New Construction v.6.0 (2021)
BREEAM NOR	Exemplary level	BREEAM-NOR v.6.1 New Construction (2023)
EU Taxonomy	Pass	Regulation (EU) 2020/852 of the European Parliament and of the Council
LEED v4.1 BETA (outside U.S.)	Pass	LEED v4.1 BETA for Building Design and Construction (February 2024)

UNIFIT[®]
PATENTED TECHNOLOGY



PARKY[®]

wood flooring's finest

Decospan nv, Industriezone Grensland
Lageweg 33, 8930 Menen — Belgium

This version supersedes all previous versions.

MADE IN BELGIUM

DECOSPAN.
01.10.2024

tel. +32 56 52 88 49 — info@par-ky.com
www.par-ky.com